

11/01/00



jc961 U.S. PRO

11-03-00

A

Please type a plus sign (+) inside this box → ☐PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 15-0230

First Inventor or Application Identifier Vincent J. McCullough

Title See 1 in Addendum

Express Mail Label No. EK745231860US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 27]
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]
4. Oath or Declaration [Total Pages]
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☒ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) filed in prior application (PTO/SB/09-12) ☐ Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☒ Other: Declaration-Unexecuted Copy

* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Michael S. Yatsko				
	TRW Inc.				
Address	Law Dept.				
	One Space Park, Bldg. E2/6051				
City	Redondo Beach	State	CA	Zip Code	90245
Country	U.S.A.	Telephone	310-812-4910	Fax	310-812-2687

Name (Print/Type)	Michael Yatsko	Registration No. (Attorney/Agent)	28,135
Signature	Michael S. Yatsko	Date	10/31/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Attachment to PTO/SB/05 (4/98) Utility Patent Application
Transmittal

1. SYSTEM AND METHOD FOR EFFICIENT AND SECURE REVOCATION OF A
SIGNATURE CERTIFICATE IN A PUBLIC KEY INFRASTRUCTURE

jc922 U.S. PTO
09/704418
11/01/00

00707 2744260

11/01/00
 Jc961 U.S. PRO

09704418-130400

Approved for use through 09/30/2000. OMB 0651-0032
 Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.
 Small Entity payments must be supported by a small entity statement,
 otherwise large entity fees must be paid See Forms PTO/SB/09-12.
 See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$)**854.00**

Complete if Known

Application Number
 Filing Date November 1, 2000
 First Named Inventor Vincent J. McCullough
 Examiner Name Unassigned
 Group / Art Unit N/A
 Attorney Docket No. 15-0230

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number **20-1515**

Deposit Account Name **TRW Inc.**

- ☒ Charge Any Additional Fee Required
 Under 37 CFR §§ 1.16 and 1.17

2. ☐ Payment Enclosed:
☐ Check ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 690	201 345	Utility filing fee	710.00
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 690	208 345	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$)**710.00**

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
28	-20** = 8	18	144
Independent Claims	3 - 3** = 0	80	0
Multiple Dependent			0

**or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
103 18	203 9	Claims in excess of 20
102 78	202 39	Independent claims in excess of 3
104 260	204 130	Multiple dependent claim, if not paid
109 78	209 39	** Reissue independent claims over original patent
110 18	210 9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$)**144.00**

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	0.00
127 50	227 25	Surcharge - late provisional filing fee or cover sheet.	0.00
139 130	139 130	Non-English specification	0.00
147 2,520	147 2,520	For filing a request for reexamination	0.00
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	0.00
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	0.00
115 110	215 55	Extension for reply within first month	0.00
116 380	216 190	Extension for reply within second month	0.00
117 870	217 435	Extension for reply within third month	0.00
118 1,360	218 680	Extension for reply within fourth month	0.00
128 1,850	228 925	Extension for reply within fifth month	0.00
119 300	219 150	Notice of Appeal	0.00
120 300	220 150	Filing a brief in support of an appeal	0.00
121 260	221 130	Request for oral hearing	0.00
138 1,510	138 1,510	Petition to institute a public use proceeding	0.00
140 110	240 55	Petition to revive - unavoidable	0.00
141 1,210	241 605	Petition to revive - unintentional	0.00
142 1,210	242 605	Utility issue fee (or reissue)	0.00
143 430	243 215	Design issue fee	0.00
144 580	244 290	Plant issue fee	0.00
122 130	122 130	Petitions to the Commissioner	0.00
123 50	123 50	Petitions related to provisional applications	0.00
126 240	126 240	Submission of Information Disclosure Stmt	0.00
581 40	581 40	Recording each patent assignment per property (times number of properties)	0.00
146 690	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	0.00
149 690	249 345	For each additional invention to be examined (37 CFR § 1.129(b))	0.00
Other fee (specify)			0.00
Other fee (specify)			0.00

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)**0.00**

SUBMITTED BY

Name (Print/Type)	Registration No. (Attorney/Agent)	Telephone
Michael S. Yatsko	28,135	310-812-4910
Signature		Date
<i>Michael S. Yatsko</i>		10/31/00

WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.


Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

"Express Mail Mailing Label Number EK745231860US"
11/01/00

Date of Deposit

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" Service under 37 CFR §1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Lorna L. Schott
(Typed or printed name of person mailing)

(Signature of person mailing)

**SYSTEM AND METHOD FOR EFFICIENT AND SECURE REVOCATION
OF A SIGNATURE CERTIFICATE IN A PUBLIC KEY INFRASTRUCTURE**

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 60/210,467 filed on June 9, 2000, and U.S. Provisional Application No. 60/229,336 filed on September 1, 2000, the contents of which are expressly incorporated by reference herein.

BACKGROUND

Field of the Invention

This invention relates to Public Key Infrastructures (PKI), and more specifically to personal revocation authority in a PKI.

Background Information

A public key infrastructure (PKI) is a collection of servers and software that enables an organization, company, or enterprise to distribute and manage thousands of unique public/private cryptographic keys in a manner that allows users to reliably determine the identity of the owner of each public/private key pair. When each member of an enterprise has a unique key, paper-based business processes may be

transitioned to an online, electronic equivalent. Public/private key pairs have the property that for any given public key there exists one and only one private key, and vice versa. Public key cryptography (i.e., the ability to publicly distribute the encryption key) can be used to digitally sign documents. If a particular message can be decrypted using one member of the key pair, then the assumption is that the message must have been encrypted using the other member. If only one person knows the key used to perform the encryption of a document in the first place, then the recipients that can decrypt the document can be sure that the sender of the document must be that person.

However, for a digital signature to be meaningful, the recipient of an object signed with the digital signature must first be able to reliably determine the owner and integrity of the key used to sign the object. Public infrastructures accomplish this using an electronic document called a digital certificate. Certificates may contain information identifying the owner of the key pair, the public component of the pair, and the period of time for which the certificate is valid. The certificate may also identify technical information about the key itself, such as the algorithm used to generate the key, and the key length. Certificates are generated by organizations, companies, or enterprises that are responsible for verifying the identity of individuals (or in some instances organizations) to which certificates are issued. The certifying organization is known as a certificate authority. The certificate authority signs each certificate using a private key known only to the certificate authority itself. This allows users of the PKI to verify both the integrity of the certificate and the identity of the authority that issued it. By issuing a certificate, a certificate authority is stating that it has verified that the public key that appears in the certificate (and, by extension, the corresponding private key) belongs to the individual listed in the certificate. The integrity with which the registration process operates is, therefore, of great importance. The process must provide mechanisms for

reliably identifying the individual and for verifying that the public key listed in the certificate belongs to that individual.

Fig. 1 shows a block diagram of an example PKI system architecture. Current PKIs that provide strong authentication of user identity accomplish this via the use of a local registration authority officer (LRAO) 12. LRAO 12 operates at a work station or server platform 14 that runs a local registration authority software application 16.

Server platform 14 may be any known computing device that may serve as a server, e.g., computer, workstation, etc. The local registration authority application 16 interfaces to other server platforms that may contain applications such as a certificate authority application 18, a registration authority application 20, and/or a key recovery authority application 22. Each application may be on the same server platform, or on separate individual server platforms 14. A user 10, that is using or desires access to the PKI system architecture, accesses the system via a web browser 22 on a client platform 24. A hardware token 26, such as a smart card, may also be operably connectable to client platform 24. Typically in current systems, user 10 presents a photo I.D. to the local registration authority officer 12 in order to authenticate the user's identity. Local registration authority officer 12 then uses workstation 14 and local registration authority application 16 to signal a registration authority application 20 to register new user 10 in the system. Local registration authority application 16 may be off-the-shelf product software that comes typically bundled with a certificate authority application 18, registration authority application 20, and key recovery authority 22 software.

A public/private key pair is generated by either the local registration authority application 16 or the registration authority application 20 (depending on products chosen and depending on how they've been configured). The public key is sent to certificate authority application 18 to be signed, thereby, generating a certificate for new

user 10. A backup copy of the private key may also be sent to key recovery authority application 22, however, normally the private key is kept on a token 26, or at client platform 24 by user 10. Once the public key is sent to a certificate authority 18 and signed, a user signature certificate is generated and provided to a local registration authority server. Local registration authority officer 12 copies the certificate (including the private key) onto a floppy disk, hardware token, or other storage medium, and then provides the user signature certificate and private key to the user.

If an enterprise uses signature certificates, then the signature certificates must be kept secure. One way to increase the security of a signature certificate is to make it very easy for users to revoke and renew a certificate if there is even a hint that the certificate may have been compromised. Further, certificates stored on devices such as smart cards, floppy disks, or hardware tokens may be misplaced. Alternatively, a certificate stored on a hard drive or removable media could become corrupted, and a backup copy might not be available. In either of these cases, the original user signature certificate must be revoked for security reasons, and a new certificate generated for the user. Moreover, in cases of suspected misconduct by a user, one of the first enterprise officers that may become aware of the possible misconduct is often the user's manager. In such cases, the manager may wish to revoke a user's signature certificate immediately.

One would not want to allow just any individual to revoke a signature certificate. Ideally, it may be preferred that only the owner of the certificate be able to revoke their certificate. However, in order to authenticate the identity of the user during the revocation process, the user must present the user signature certificate. After the user is authenticated, the user may be allowed to revoke the certificate. In the case of a lost certificate, a user has no way of authenticating his identity during the revocation process.

Current PKI operating models require a registration authority (RA) which is a process that not only registers a user, but also revokes digital certificates of the user when they are no longer needed. Registration Authorities may be specialized enterprise officers who must be contacted in such cases. This is expensive, in that it requires additional labor via specialized officers, and slow, in that the manager must locate and explain the situation to the officer. Depending on the implementation, the registration authority process can be very impractical for very large PKI implementations.

A registration authority might be a system administrator or security control officer at some geographic location. A registration authority which performs a revocation of certificates may be referred to as a local revocation authority (LRA). Revocation requests are submitted by a user via some method (e.g., paper, email, web, etc.) to the LRA. The revocation requests are queued for work off within some specified time frame.

Current public key infrastructures for revoking digital certificates have some problems. First, for large organizations, the cost to implement systems similar to that shown in Fig. 1 are high due to the need for multiple local registration authority officers to handle the large number of users that may reside at various locations. Generally, certificate revocation requests are submitted via some method (paper, email, web, etc.) to the local registration authority. The certificate revocation requests are queued for working off by the local registration authority officers. Current systems are inefficient because request queues will be subject to human intervention. The normal certificate revocation process involves actions by the requester (i.e., user) and the local registration authority. After some time and effort, the requester receives notification of revocation of the digital certificate. This time may be dependent on the number of requests in the queue and/or the efficiency of the local registration authority officers.

Thus, current systems and processes are less secure because of the potential lag in time between a revocation request and deletion of the certificate from the PKI directory.

Moreover, current systems are less secure because a relationship between the requester and the local registration authority officer does not necessarily exist and, therefore, presents opportunity for an intruder to exploit. In addition, current systems are less secure since without a manager of the user (or some other individual who may personally know the user), in the process flow, there is no definitive proof who the pin and password (required for generation of new digital certificates) given to the user is issued to.

Therefore, a good PKI implementation must provide a secure and timely method to revoke digital certificates when there is a threat of compromise, a certificate is lost, or when situations necessitate that an individual's access be denied. Further, it is desired to reduce the labor and time necessary to revoke digital certificates.

The revocation and replacement process must not be too easy, otherwise hackers may perpetrate a denial of service attack by randomly revoking user's certificates. Currently, there has generally been no way to revoke and replace a certificate so that the process is both easy and secure.

Therefore, a need exists for an efficient, speedy, and secure revocation process for revoking digital signature certificates of users in a PKI.

SUMMARY

The present invention is directed to a method for revocation of a signature certificate in a Public Key Infrastructure (PKI) that includes: creating an authenticated secure channel with a registration web server; requesting the registration web server revoke a user signature certificate, where the requesting occurs over the authenticated secure channel; revoking the user signature certificate; notifying a directory by the

registration web server of revocation of the user signature certificate; and setting a user entry in the directory to a state without a signature certificate.

The present invention is also directed to an article comprising a storage medium having instructions stored therein, where the instructions when executed cause a processing device to perform: creating an authenticated secure channel with an entity; receiving a request from the entity to revoke a user signature certificate; revoking the user signature certificate; and notifying a directory of revocation of the user signature certificate.

The present invention is further directed to a system for revocation of a signature certificate in a Public Key Infrastructure (PKI) that includes: one or more servers operably connected to a network; a directory operably connected to the network, where the directory contains information on one or more users; one or more client platforms operably connected to the network, where the users have access to the servers from the client platforms; and a registration web server operably connected to the network.

The registration web server receives a request for revocation of a user signature certificate from an entity. The registration web server revokes the user signature certificate only if the entity is permitted to revoke the user signature certificate. The registration web server notifies the directory of revocation of the user signature certificate if revoked.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is further described in the detailed description which follows in reference to the noted plurality of drawings by way of non-limiting examples of embodiments of the present invention in which like reference numerals represent similar parts throughout the several views of the drawings and wherein:

Fig. 1 is a block diagram of an example PKI system architecture;

Fig. 2 is a block diagram of an exemplary system architecture in which PKI processes may be practiced according to an example embodiment of the present invention;

Fig. 3 is a flowchart of an example process for revocation of a compromised signature certificate in a public key infrastructure according to an example embodiment of the present invention;

Fig. 4 is a flowchart of an example process for revocation of a lost signature certificate in a public key infrastructure according to an example embodiment of the present invention; and

Fig. 5 is a flowchart of an example process for revocation of a signature certificate with prejudice in a public key infrastructure according to an example embodiment of the present invention.

DETAILED DESCRIPTION

The particulars shown herein are by way of example and for purposes of illustrative discussion of the embodiments of the present invention. The description

taken with the drawings make it apparent to those skilled in the art how the present invention may be embodied in practice.

Further, arrangements may be shown in block diagram form in order to avoid obscuring the invention, and also in view of the fact that specifics with respect to implementation of such block diagram arrangements is highly dependent upon the platform within which the present invention is to be implemented, i.e., specifics should be well within purview of one skilled in the art. Where specific details (e.g., circuits, flowcharts) are set forth in order to describe example embodiments of the invention, it should be apparent to one skilled in the art that the invention can be practiced without these specific details. Finally, it should be apparent that any combination of hard-wired circuitry and software instructions can be used to implement embodiments of the present invention, i.e., the present invention is not limited to any specific combination of hardware circuitry and software instructions.

Although example embodiments of the present invention may be described using an example system block diagram in an example host unit environment, practice of the invention is not limited thereto, i.e., the invention may be able to be practiced with other types of systems, and in other types of environments (e.g., servers).

Reference in the specification to “one embodiment” or “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of the phrase “in one embodiment” in various places in the specification are not necessarily all referring to the same embodiment.

Fig. 2 shows a block diagram of an exemplary system architecture 100 in which Public Key Infrastructure (PKI) processes may be practiced according to an example embodiment of the present invention. The present invention is not limited to the system architecture 100 shown in Fig. 2. The boxes shown in Fig. 2 represent entities that may be hardware, software, or a combination of the two. The entities are operably connected together on a network. Entities not shown as being connected to the network represent one or more human beings that perform the function denoted inside the box.

System architecture 100 includes Data Entry 102 which performs a data entry function for Authoritative Database 104. Authoritative Database 104 is resident on server platform 106. A server platform 106 is referred to in this description but it should be understood that the present invention is not limited to any particular server architecture. Server platform 106 may be, for example, UNIX or Windows NT servers.

Authoritative database 104 contains information about members of the group or enterprise (e.g., company) for which PKI services in accordance with the present invention may be performed. The present invention is not limited by the structure of the group or enterprise for which information is stored in the authoritative database 104. The information contained in Authoritative database 104 may include, for example, the name, address, telephone numbers, manager's name, employee identification, etc., of the members of the group or enterprise. Directory 108 contains the same information contained in database 104, but is optimized for fast look-up of the information stored therein rather than fast data entry. The information contained in Directory 108 may be

accessed faster than accessing the information from database 104. Directory 108 functions similar to an on-line quickly accessible phone book, containing reference information about the members of the group or enterprise stored in authoritative database 104.

5 Certificate authority 110 may be conventional off-the shelf software executed on server platform 106. Certificate authority 110 provides storage of certificates and related information. This will be described in more detail hereinafter. Registration authority 112 may also be off-the shelf software executable on server platform 106. Registration authority 112 will also be described in more detail hereinafter. Key recovery authority 114 may also be off-the shelf server software executable on Server Platform 106, and may provide the function of recovering keys (e.g., archived or lost keys) for members of the group or enterprise.

10 A Windows 2000 Domain Certificate Authority (CA) 116 is shown with a dotted line connection to the network and may or may not be part of a system according to the present invention. Windows 2000 is able to use PKI certificates for network single sign-on, but Windows 2000 is designed to use only the Windows Certificate Authority Windows. Therefore, a system according to the present invention may include a conventional Certificate Authority 110 as well as a 2000 Domain CA 116.

15 Legacy server 118 executes legacy application programs 120. Legacy server 118 may be, without limitation, a main frame, mini-computer, workstation or other server capable of hosting legacy software applications. Legacy software applications generally may not be designed to be inherently interoperable with a PKI. Legacy

applications 120 may be accessible on the client side by a custom client 128 such as an emulator or custom database Graphic User Interface (GUI). Examples of emulators are terminal emulators of an IBM 3270 or terminal emulators of a vt100.

Registration web page 122, which may be one or more pages, functions as the user interface to system architecture 100 shown in Fig. 1. Web Server 124 is a software application that serves Web Pages (such as web page 122) or other HTML outputs to a web browser client (such as web browser 126). Web Server 124 may be any software application that serves Web Pages or HTML outputs such as, for example, Apache, Microsoft Internet Information Server application, etc.

Web browser 126 is resident on client platform 128 which may be any user computer or computing device. Web browser 126 may be a client software application for browsing web pages such as, for example, HTML protocols, XML protocols, or other protocols. Web browser 126 may be programmed to operate with PKI certificates issued by certificate authority 110. Examples of web browsers which have this capability include Netscape Navigator and Microsoft Internet Explorer. The token 130 may be a smart card, a device with a Universal Serial Bus (USB), or other hardware token device capable of generating, storing, and/or using PKI certificates.

A user 132 is a person that uses or desires access to system architecture 100. User 132 may transition through a number of states which include, for example, a new user, a current user, and a former user. A former user is no longer a member of the group or enterprise. System architecture 100 is described with reference to two levels of security with each level corresponding to a different security requirement. The

number of the levels of security is not a limitation of the present invention. The level 1 search engine 134 may be a search engine that is permitted to search system architecture 100, but is allowed access to only level 1 data which is the lowest level of security. Level 1 data may be, for example, data which is freely distributable whereas level 2 data may be considered to be proprietary. A Level 2 search engine 136 may be a search engine which is allowed to search both level 1 and level 2 data. A Level N search engine (not illustrated) may be a search engine which is allowed to search through servers possessing Levels 1 through N data.

A secured level server with Level 1 data may be a web server containing only level 1 data that is secured so that users may need to have level 1 access (at least) to access the level 1 servers. A secured web server with level 2 data 140 may be a web server that contains level 2 data that has been secured so that users must have at least level 2 access to access the level 2 servers. A user with level 2 access may have access to both level 1 and level 2 servers. A secured web server with level N data (not illustrated) is a web server that contains level N data which is accessible by users with level N or above. Users with level N or above access may have access to all levels of data up through level N data.

VPN Extranet 142 may be a software application which functions as a network gateway, which as illustrated, may be either to legacy server 118 and legacy application 120 or to an external network such as the Internet. Personal revocation authority 144 may be one or more people that are in charge of revocation of members from system network 100. Personal registration authority 146 may be one or more people that are in

charge of registration of members in system network 100. Personal recovery approval 148 may be one or more people that are in charge of obtaining recovery of certificates. A Recovery Agent 150 may be one or more people that perform recovery of certificates and may only recover a certificate if the certificate has first been designated as recoverable by another person. Personal role approval 152 may be one or more people that approve different role functions within the system network 100. A web server administrator may be one or more people that are in charge of various web functions in system network 100.

The present invention relates to systems and methods for efficient and secure revocation of a signature certificate in a public key infrastructure that insures that digital certificates are revoked efficiently and in a timely manner to avoid compromise to an enterprise, and with minimum human intervention, thereby, lowering the PKI operating and maintenance cost.

In systems and methods according to the present invention, a user with a digital signature certificate can request his/her certificate be revoked via a graphical user interface (GUI) when there is a belief that a compromise of the user's signature certificate has occurred. A personal revocation authority (PRA) (i.e., a manager or supervisor of the user) is also provided the capability to revoke a user's signature certificate on the behalf of the user in the case of a lost certificate, or when the manager wishes to deny the user access to the enterprise.

In systems and methods according to the present invention, a PKI directory associates each user with a manager entry, and verifies that a manager desiring to

revoke a user's signature certificate is authorized to do so. Once a user's signature certificate has been revoked, the user is denied any further access to resources (e.g., servers) of the enterprise. A user may have one and only one digital signature certificate. Once a user's signature certificate is revoked, the user seeking access to enterprise servers will need to request another signature certificate. Since a second person, i.e., the user's manager, is involved in the issuance of a signature certificate to the user, authorization and control of digital signature certificates is still maintained.

Fig. 3 shows a flowchart of an example process for revocation of a compromised signature certificate in a public key infrastructure according to an example embodiment of the present invention. Initially, when the user originally generated his/her signature certificate, the user created a directory password, or provided some other form of information known only to the user S10. The password may be sent and stored at a directory S11. The dashed arrows in Fig. 3 between steps S11 and S12 signify that some period of time has elapsed between steps S11 and S12. Now, the user suspects that the user's signature certificate may have been compromised. This may occur because the user believes someone else has access to the user's signature certificate and may use it illegally. Therefore, the user wishes to revoke the user's signature certificate.

The user accesses the registration web server S12. The registration web server requests the user's signature certificate for authentication S13. The user provides the potentially compromised user signature certificate to the registration web server, and the registration web server receives this signature S14. The user has now been

authenticated and, therefore, an encrypted channel is created between the registration web server and the user's platform S15. The user requests revocation of the user's signature certificate S16. The registration web server notifies the directory that the user signature certificate has been revoked S17. Then it is determined if the user desires a new certificate S18, and if not, the process terminates S19. If the user desires a new certificate (and this is highly likely), using the same encrypted channel, the user is provided a one time personal identification number (PIN) or password by the registration web server S20. The user may then use the PIN and the directory password, created some time ago, to request a new signature certificate S21. This process is secure since the user has used two pieces of information that only this user would know, the information stored in the directory (i.e., directory password), and the information provided during the revocation process (i.e., PIN) to obtain a new signature certificate. The user is not able to request a new signature certificate until the previous certificate has been revoked.

Fig. 4 shows a flowchart of an example process for revocation of a lost signature certificate in a public key infrastructure according to an example embodiment of the present invention. As noted previously, during the time the user initially created a user signature certificate, a directory password for the user was also created S30. The password may be sent to the directory S31. Now, sometime later (denoted by dashed arrow), the user has lost his/her signature certificate and, therefore, notifies a personal revocation authority (PRA) of the lost signature certificate S32. A personal revocation authority may be a manager or supervisor of the user. The personal revocation

authority accesses the registration web server S33. The registration web server requests the signature certificate of the personal revocation authority for authentication S34. The registration web server receives the valid signature from the personal revocation authority S35. The PRA is now authenticated. An encrypted channel is then setup to the registration web server S36. The personal revocation authority requests revocation of the users signature certificate S37. The registration web server queries the directory to determine if the personal revocation authority is permitted to terminate the user S38. The directory contains information regarding the user, and one or more managers or supervisors of the user. These managers may serve as personal revocation authorities and be authorized to determine the generation or revocation of signature certificates of the user.

Whether the personal revocation authority is permitted to terminate the user is determined S39, and if not, the process ends S40. If the personal revocation authority is permitted to terminate the user, the registration web server signals the directory that the users signature certificate has been revoked and to set the user's status back to that of a new user (i.e., a user without a signature certificate) S41. It is determined whether the personal revocation authority wants to allow the user to have a new certificate S42. If not, the process terminates S43. Otherwise, the personal revocation authority is provided a one time PIN by the registration web server S44. The personal revocation authority gives the PIN to the user in a face-to-face meeting S44. The user now uses the PIN and the directory password to request a new signature certificate S46.

Fig. 5 shows a flowchart of an example process for revocation of a signature certificate with prejudice in a public key infrastructure according to an example embodiment of the present invention. A personal revocation authority desires to immediately all access privileges of a particular user S50. This may be due to the user's misconduct, the user's termination of employment, the suspicion of misconduct by the user, or for other reasons that demand immediate termination of the user's access to resources of the enterprise. The personal revocation authority accesses the registration web server S51. The registration web server requests the personal revocation authority's signature for authentication S52. The registration web server receives the signature of the personal revocation authority S53. An encrypted channel is then created to the registration web server S54. The personal revocation authority then requests revocation of the user's signature certificate S55. The registration web server queries the directory to determine if the personal revocation authority is permitted to terminate the user S56. Whether the personal revocation authority is permitted to terminate the user S57 is determined, and if not, the process ends S58. If the personal revocation authority is permitted to terminate the user, the registration web server signals the directory that the user's signature certificate has been revoked, and to set the user back to a new user state S59. A new user state is a state whereby the user no longer has a signature certificate and cannot access servers of the enterprise without obtaining a signature certificate.

A system or method for efficient secure revocation of a signature certificate in a PKI according to the present invention is advantageous in that it has lower labor costs

and is more timely to revoke digital certificates. Systems and methods according to the present invention are also advantageous in that they avoid revocation request queues. Moreover, the user is allowed to revoke his/her certificate to avoid compromise to the enterprise. Further, the present invention allows a manager of the user to revoke the user's certificate on their behalf or when it is necessary to deny the user access to the enterprise.

System and methods for generation of a signature certificate in a public key infrastructure according to the present invention is also advantageous in that it provides cost savings and improved security. Costs are saved in that the present invention reduces paper work by incorporating an electronic process, shortens business process time lines since minimal amount of human intervention is required, and promotes remote collaboration amongst the members of the enterprise. Security is improved since eavesdropping is protected against, spoofing is protected against, and a method or system according to the present invention authenticates a user's identity, including hostile insiders. The advantages of the present invention are accomplished in part since manual processes that current PKI systems use have been replaced with automated processes that accomplish many of the same tasks. System and methods according to the present invention provide a very inexpensive mechanism for implementing a face-to-face meeting as a part of the new user registration process, therefore, providing improved security while at the same time not adding significantly to the cost of the system (e.g., labor costs).

It is noted that the foregoing examples have been provided merely for the purpose of explanation and are in no way to be construed as limiting of the present invention. While the present invention has been described with reference to a preferred embodiment, it is understood that the words which have been used herein are words of description and illustration, rather than words of limitation. Changes may be made within the purview of the appended claims, as presently stated and as amended, without departing from the scope and spirit of the present invention in its aspects. Although the present invention has been described herein with reference to particular methods, materials, and embodiments, the present invention is not intended to be limited to the particulars disclosed herein, rather, the present invention extends to all functionally equivalent structures, methods and uses, such as are within the scope of the appended claims.

WHAT IS CLAIMED IS:

1 1. A method for revocation of a signature certificate in a Public Key

2 Infrastructure (PKI) comprising:

3 creating an authenticated secure channel with a registration web server;

4 requesting the registration web server revoke a user signature certificate, the

5 requesting occurring over the authenticated secure channel;

6 revoking the user signature certificate;

7 notifying a directory by the registration web server of revocation of the user

8 signature certificate; and

9 setting a user entry in the directory to a state without a signature certificate.

1 2. The method according to claim 1, further comprising generating a directory

2 password for the user during creation of the user signature certificate.

1 3. The method according to claim 2, wherein the creating and requesting are

2 initiated by the user.

1 4. The method according to claim 3, wherein the security of the user signature

2 certificate has been potentially compromised.

1 5. The method according to claim 3, further comprising sending the user one of
2 a password and a personal identification number (PIN) by the registration web server
3 after the setting of the user entry.

1 6. The method according to claim 5, further comprising requesting a new
2 signature certificate by the user using the directory password and one of the password
3 and the PIN.

1 7. The method according to claim 3, further comprising using the user signature
2 certificate to authenticate the user before the creating.

1 8. The method according to claim 1, further comprising notifying a personal
2 registration authority by a user that the user has lost the user signature certificate, the
3 notifying occurring before the creating.

1 9. The method according to claim 8, wherein the creating and requesting are
2 initiated by the personal registration authority.

1 10. The method according to claim 9, further comprising requesting a personal
2 registration authority's signature certificate to authenticate the personal registration
3 authority before the creating.

1 11. The method according to claim 10, wherein the personal registration
2 authority is a supervisor of the user.

1 12. The method according to claim 10, further comprising querying the directory
2 after the requesting the registration web server revoke the user signature certificate to
3 determine if the personal registration authority is permitted to revoke the user signature
4 certificate.

1 13. The method according to claim 12, further comprising revoking the user
2 signature certificate by the registration web server only if the personal registration
3 authority is permitted to revoke the user signature certificate.

1 14. The method according to claim 13, further comprising generating a directory
2 password for the user during creation of the user signature certificate.

1 15. The method according to claim 14, further comprising sending the user one
2 of a password and a personal identification number (PIN) by the registration web server
3 after the setting of the user entry.

1 16. The method according to claim 15, further comprising requesting a new
2 signature certificate by the user using the directory password and one of the password
3 and the PIN.

1 17. The method according to claim 1, wherein the revoking is performed by the
2 registration web server.

1 18. An article comprising a storage medium having instructions stored therein,
2 the instructions when executed causing a processing device to perform:
3 creating an authenticated secure channel with an entity;
4 receiving a request from the entity to revoke a user signature certificate;
5 revoking the user signature certificate; and
6 notifying a directory of revocation of the user signature certificate.

1 19. The article according to claim 18, further comprising verifying the entity is
2 permitted to revoke the user signature certificate.

1 20. The article according to claim 19, further comprising revoking the user
2 signature certificate only if the entity is permitted to revoke the user signature certificate.

1 21. The article according to claim 18, wherein the entity is the user.

1 22. The article according to claim 18, wherein the entity is a personal revocation
2 authority.

1 23. A system for revocation of a signature certificate in a Public Key

2 Infrastructure (PKI) comprising:

3 at least one server operably connected to a network;

4 a directory operably connected to the network, the directory containing
5 information on at least one user;

6 at least one client platform operably connected to the network, the at least one
7 user having access to the at least one server from the at least one client platform; and

8 a registration web server operably connected to the network, the registration web
9 server receiving a request for revocation of a user signature certificate from an entity,
10 the registration web server revoking the user signature certificate only if the entity is
11 permitted to revoke the user signature certificate, the registration web server notifying
12 the directory of revocation of the user signature certificate if revoked.

1 24. The system according to claim 23, wherein the information on at least one

2 user includes a user entry related to the user signature certificate, the directory setting
3 the user entry in the directory to a state without a signature certificate if the user
4 signature certificate is revoked.

1 25. The system according to claim 23, further comprising an authenticated

2 secure channel between the entity and the registration web server, the requesting
3 occurring over the authenticated secure channel.

27. The system according to claim 23, wherein the entity comprises a personal information authority.


28. The system according to claim 27, wherein the personal registration authority is a supervisor of the at least one user.

**SYSTEM AND METHOD FOR EFFICIENT AND SECURE REVOCATION
OF A SIGNATURE CERTIFICATE IN A PUBLIC KEY INFRASTRUCTURE**

ABSTRACT

System and method for revocation of a signature certificate in a Public Key

5 Infrastructure (PKI) that includes an enterprise with one or more servers, a directory, a
registration web server, and one or more client platforms that allow users to access the
servers of the enterprise. A user may desire to revoke a potentially compromised
signature certificate of the user, or a manager of the user may revoke a signature
certificate because it has been lost by the user, or the manager no longer desires that
10 the user has access to servers of an enterprise. A user or personal revocation authority
(manager) initiates a revocation process by creating an authenticated secure channel
with a registration web server. Using the authenticated secure channel, the user or
personal revocation authority requests the registration web server revoke a user
signature certificate. The registration web server queries a directory to verify that the
15 personal revocation authority is permitted to revoke the signature certificate of the user.
The user signature certificate is revoked. The directory is notified by the registration
web server of revocation of the user signature certificate. A user entry in the directory
is set to a state without a signature certificate. A process for a new signature certificate
for the user may now occur.

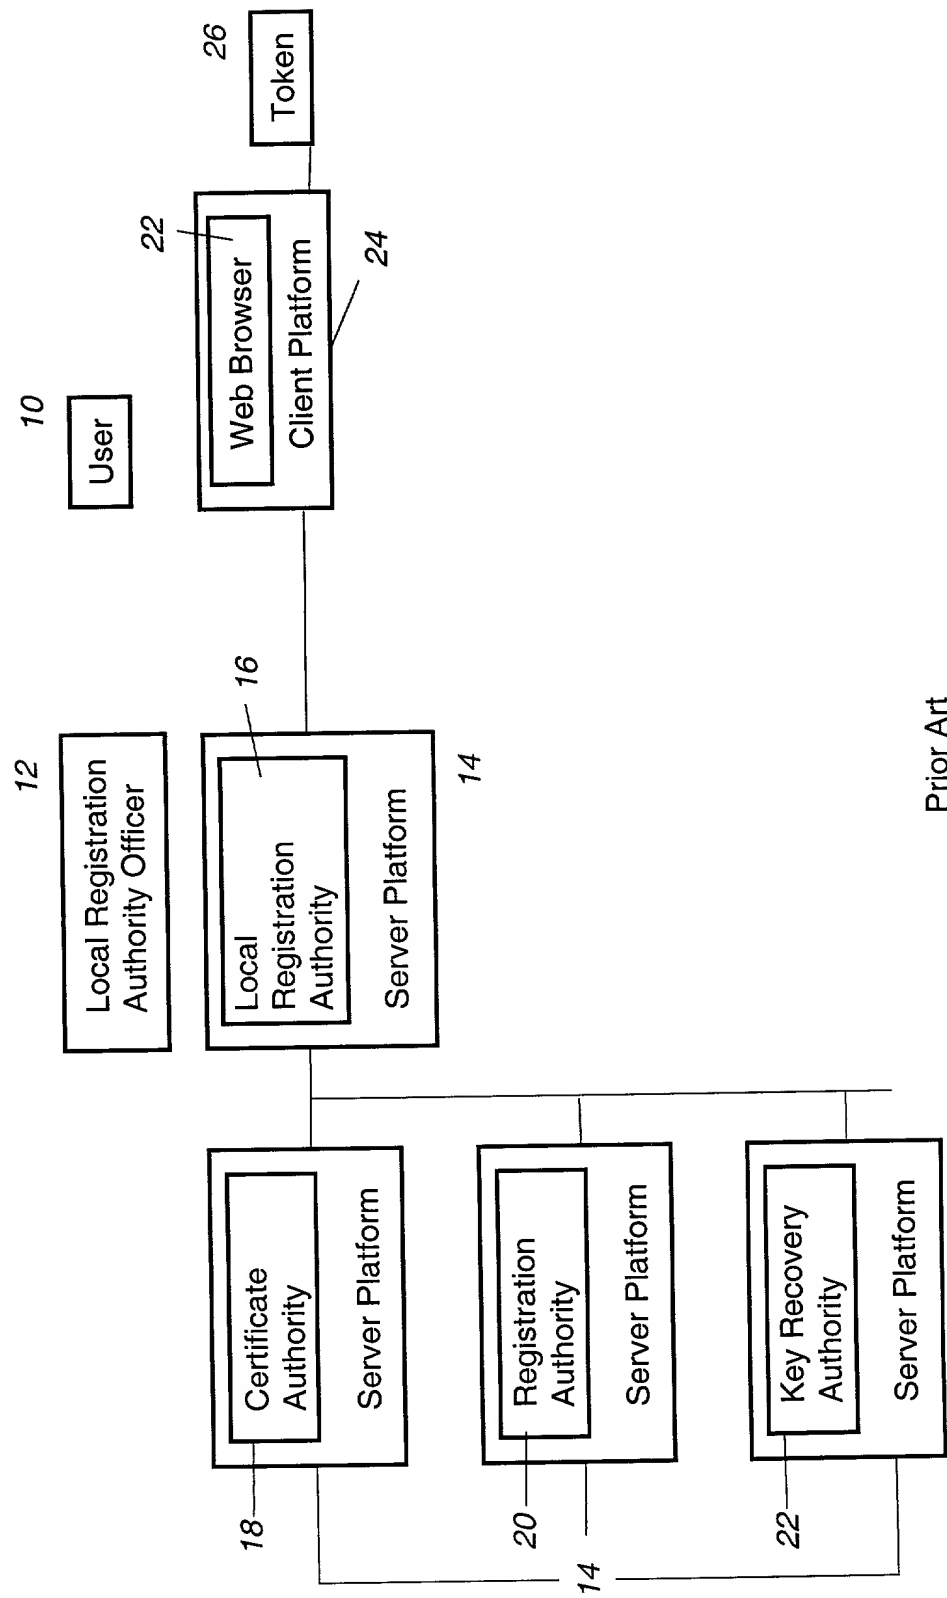

Prior Art

Figure 1

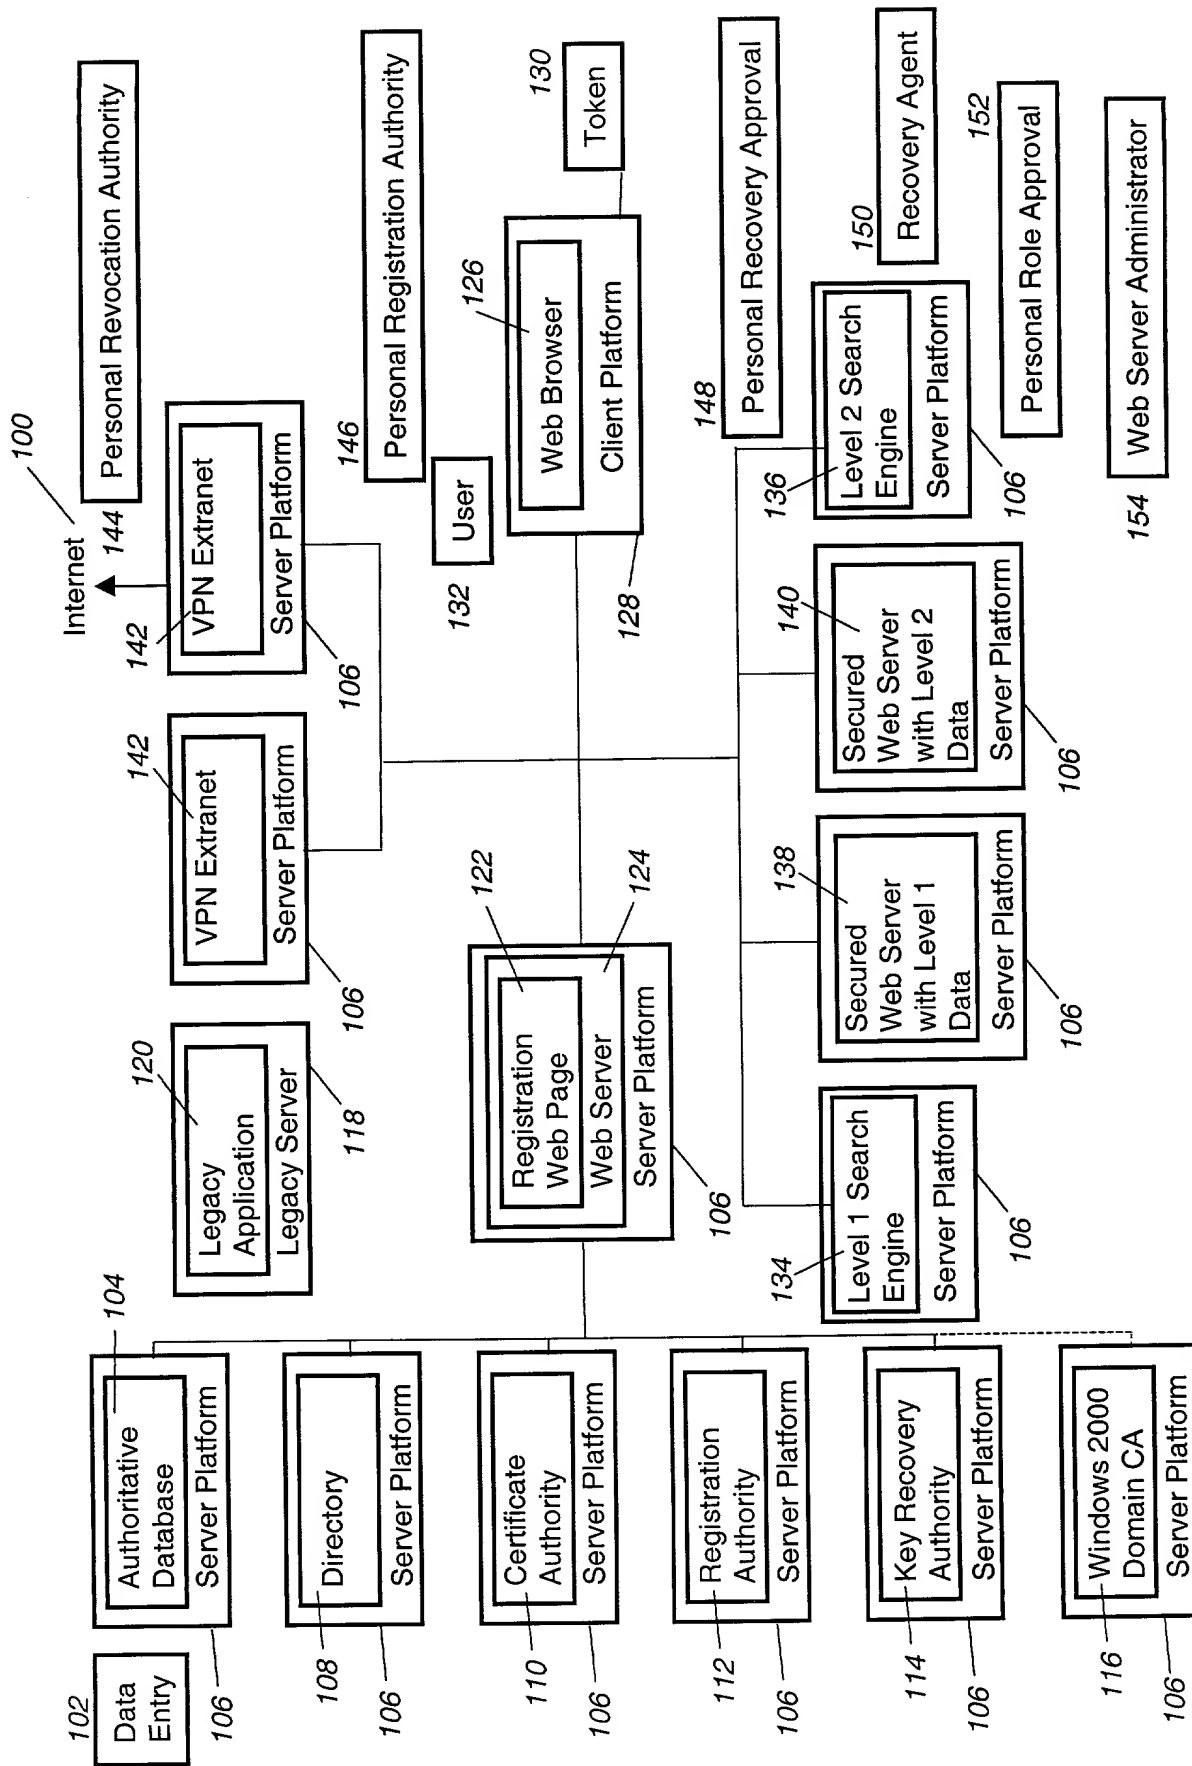


Figure 2

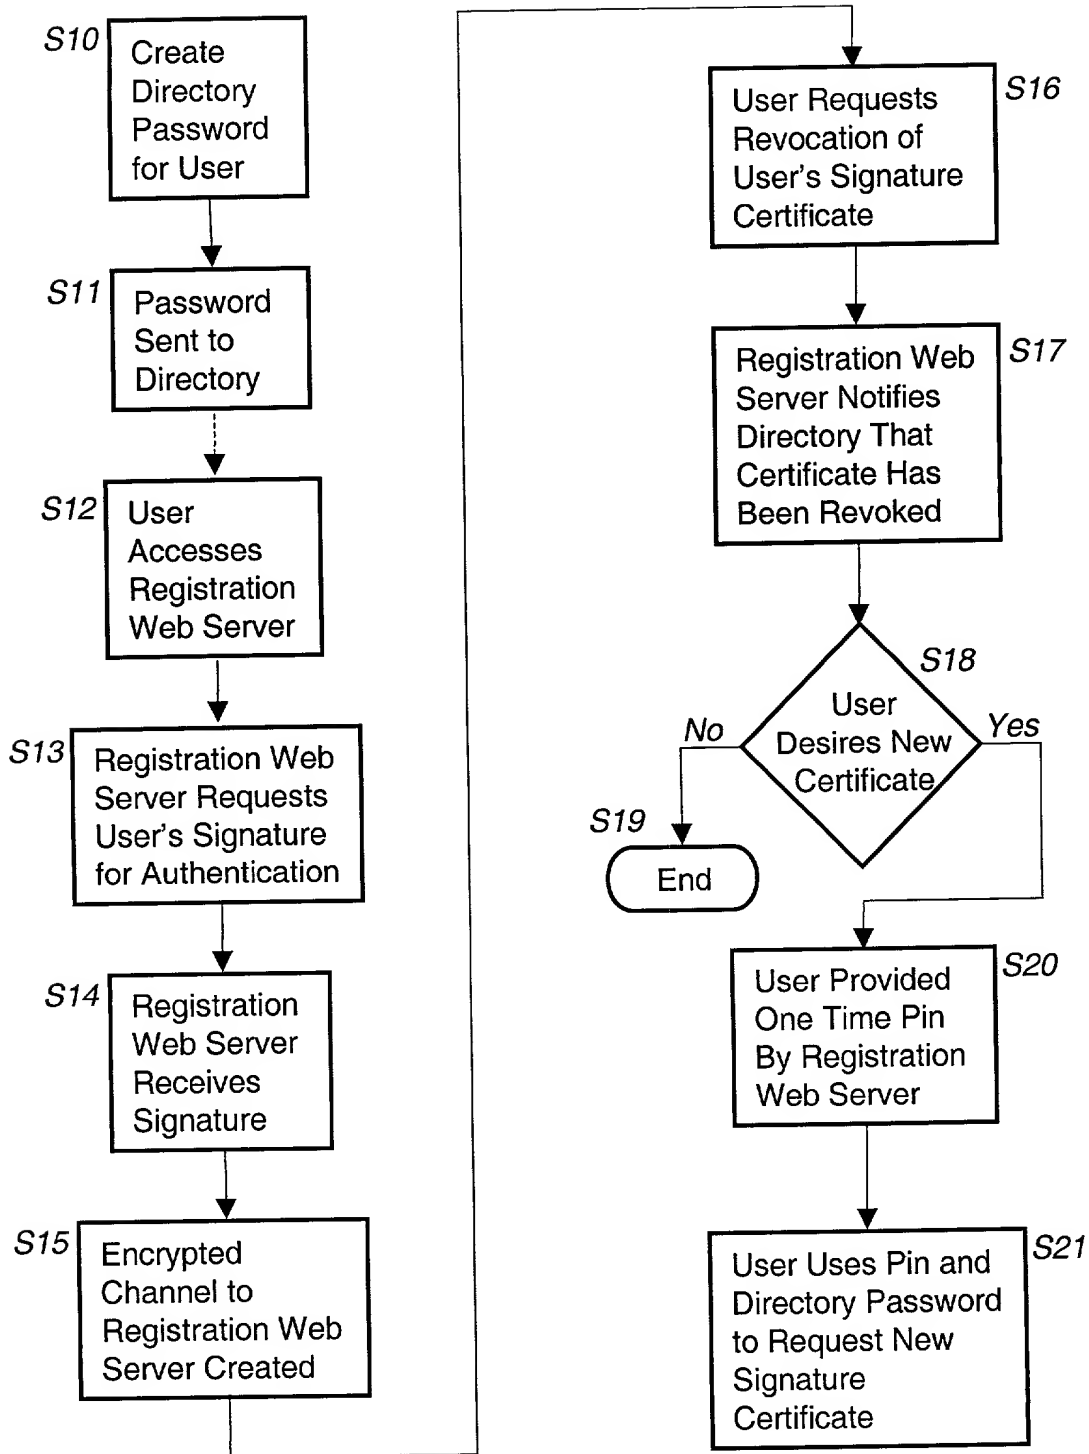


Figure 3

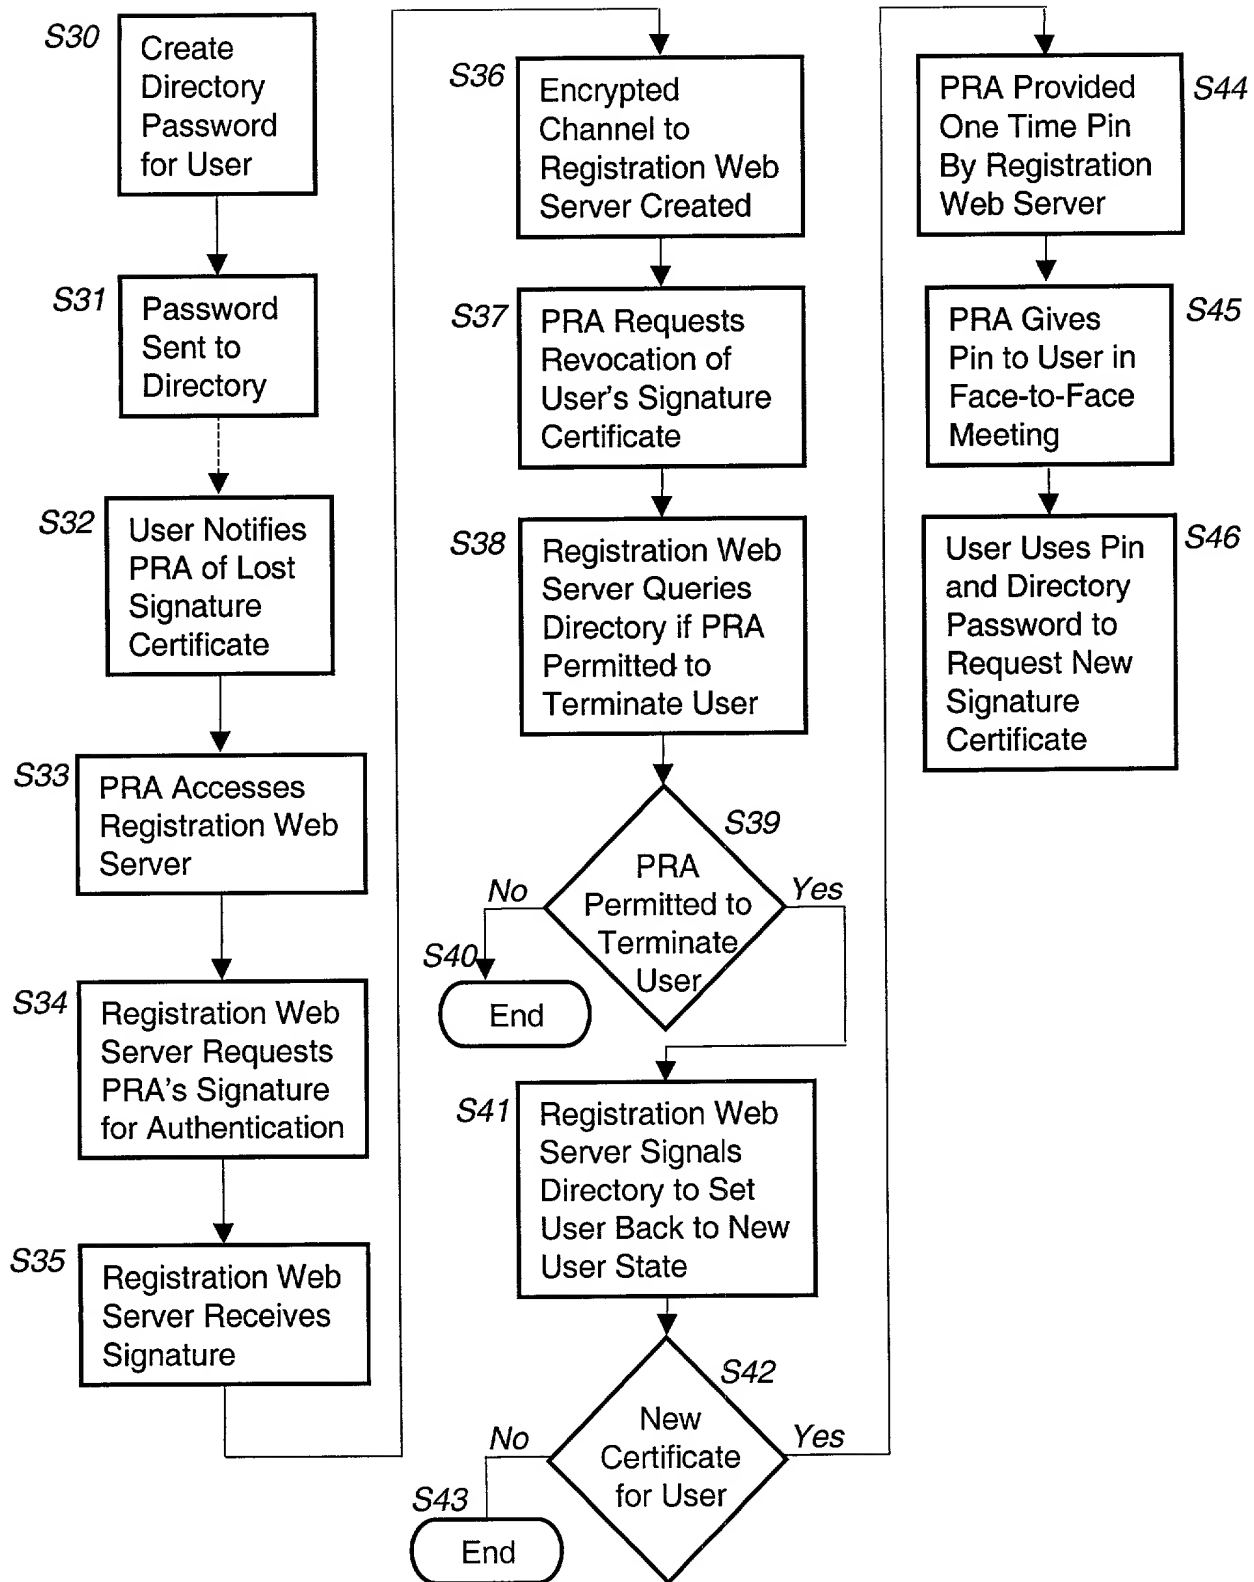


Figure 4

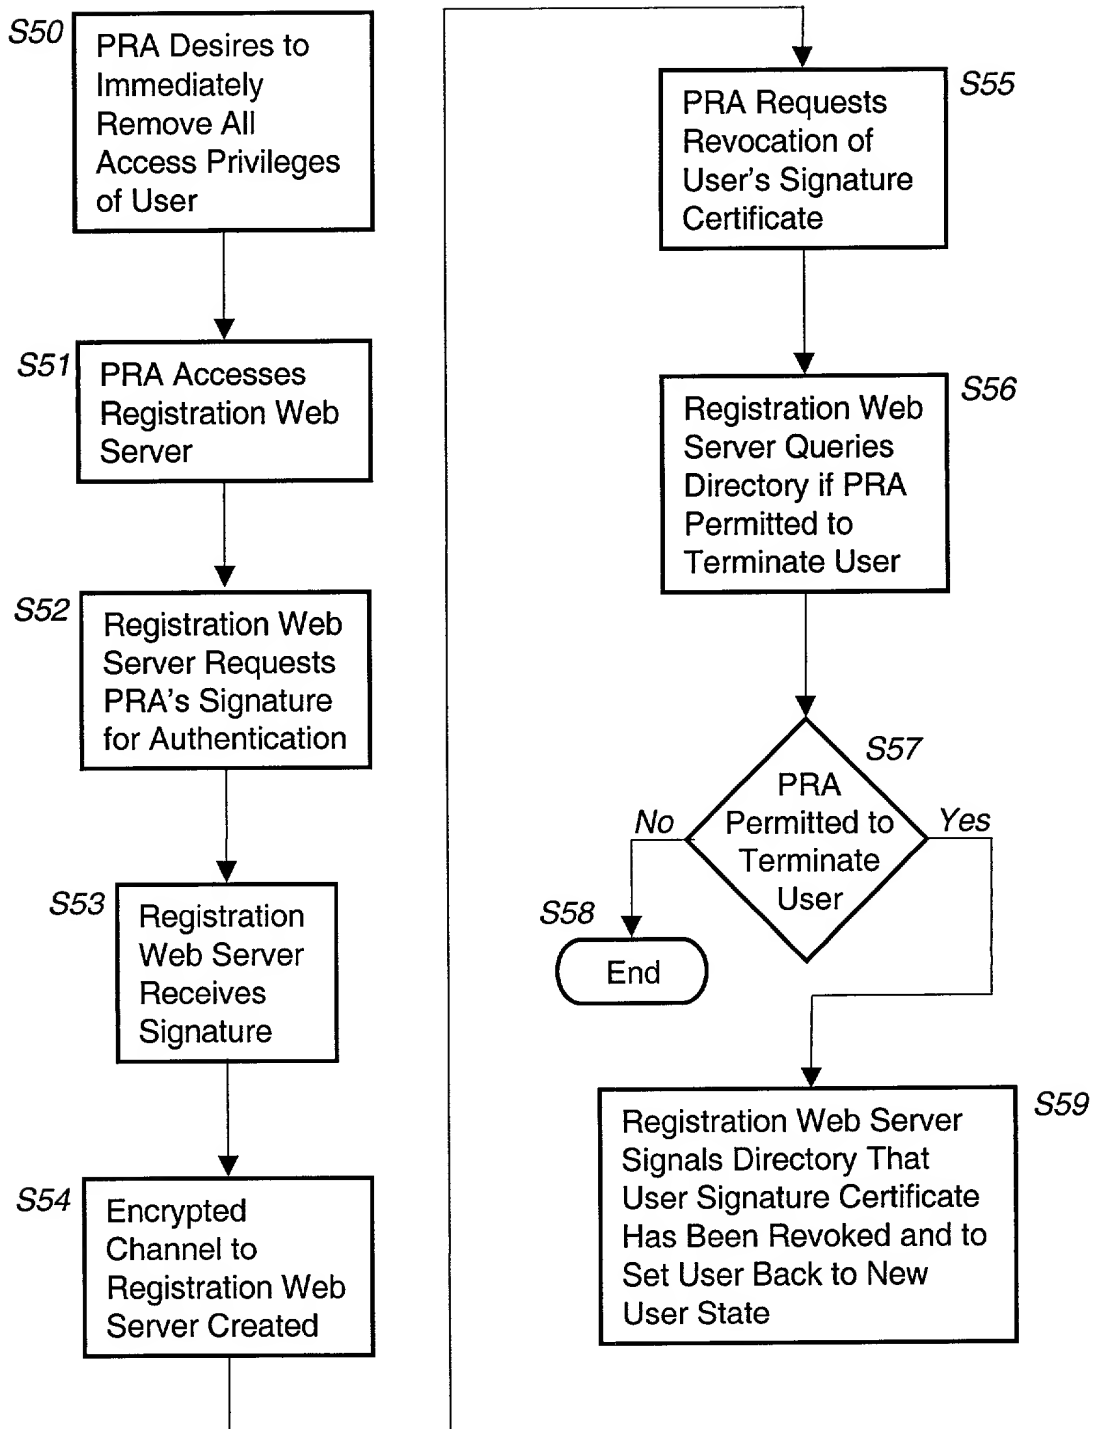


Figure 5

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled SYSTEM AND METHOD FOR EFFICIENT AND

SECURE REVOCATION OF A SIGNATURE CERTIFICATE IN A PUBLIC KEY INFRASTRUCTURE
the specification of which

_____ is attached hereto

_____ was filed on _____ as Application
Serial No. _____ and was amended on
_____.
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

NONE

(Number)

(Country)

(Day/Mo./Yr. Filed)

Yes

No

Docket No. 15-0230

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>60/210,467</u> (Number)	<u>USA</u> (Country)	<u>June 9, 2000</u> (Day/Mo./Yr. Filed)	<u>Pending</u> (Status)
<u>60/229,336</u> (Number)	<u>USA</u> (Country)	<u>September 1, 2000</u> (Day/Mo./Yr. Filed)	<u>Pending</u> (Status)

hereby appoint as principal attorneys:

Robert W. Keller, Reg. No. 25,347
Michael S. Yatsko, Reg. No. 28,135
Connie M. Thousand, Reg. No. 43,191
Donald E. Stout, Reg. No. 26,422

each with full power to prosecute this application, to transact all business in the United States Patent and Trademark Office connected therewith, and to appoint and revoke associate and substitute associate attorneys.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Address all telephone calls to: (310) 812-4910

Address all correspondence to: PATENT COUNSEL
TRW Inc.
Space & Electronics Group
One Space Park, E2/6051
Redondo Beach, California 90278

Docket No. 15-0230

Full name of sole or first inventor Vincent J. McCullough

Inventor's signature _____ Date: _____

Residence Chantilly, Virginia

Citizenship United States

Post Office Address 13899 Ferrara Court, Chantilly, VA 20151

Full name of second inventor Kenneth W. Aull

Inventor's signature _____ Date: _____

Residence Fairfax, Virginia

Citizenship United States

Post Office Address 5364 Lake Normandy Court, Fairfax, VA 22030